





Tool storage
Fluid management
Waste disposal


Automotive service provider

■ modular

individual planning and configuration for optimal organisation of your workplace, tailored precisely to your needs

■ quality

uncompromising robustness and stability, designed to withstand many years of use

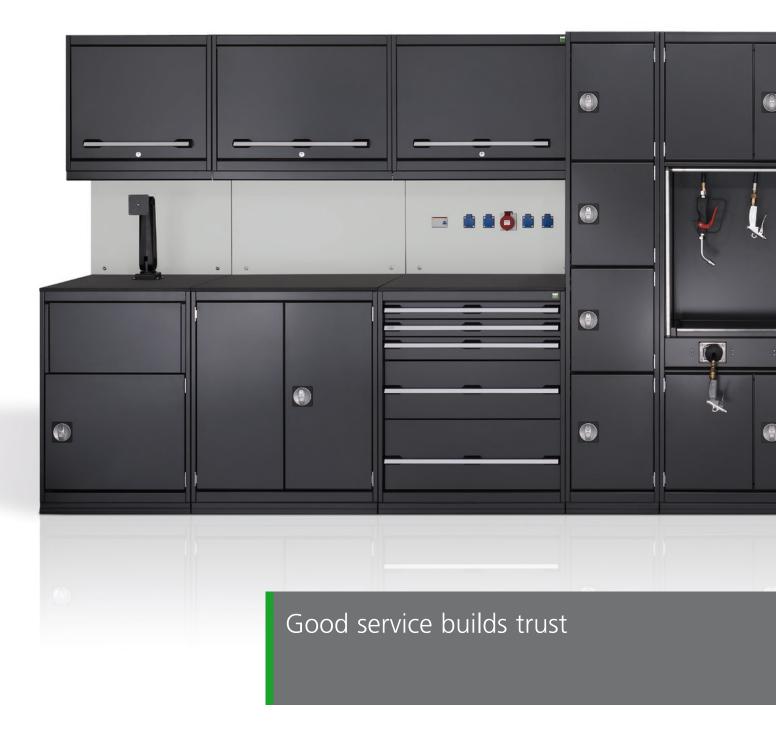



aesthetic

clear, continuous design. Choose a custom colour sheme to match your corporate identity

design

precise functions, designed with the professional user in mind



There are many factors involved in providing a first class quality service. Customers rely on your professional expertise. bott cubio workshop storage equipment creates the best working environment for your professional tasks. With bott cubio, organisation, cleanliness and efficiency come as standard. These are essential factors in your success and help promote a professional image to your customer base.

The basis for first class service







Quality in detail



Fluid management

- for fluids such as air, oil or water
- removable drip tray
- inspection flap in rear wall
- 650W x 650D x 2050H mm, for 4 fluids
- 800W x 650D x 2050H mm, for 6 fluids
- 650W x 650D x 980H mm, for 2 fluids
- 800W x 650D x 950H mm, for 3 fluids



System cupboards

- client specific configuration of height adjustable and pull-out shelves, internal drawers and much more
- 100kg load capacity per drawer
- perfo lined hinged doors with an opening angle > 180°
- 3 point locking
- 650/800/1300W x 650D x 950H mm
- 800/1300W x 650D x 2050H mm



Locker unit with 4 hinged doors

- storage for personal effects
- perfo lined hinged doors with an opening angle > 180°
- hierarchical master key locking systems optionally available
- 400W x 650D x 2050H mm





Pull-out recycling depot

- hinged flap provides easy access
- recycling containers on full extension slides, 200kg load capacity
- aluminium containers with side mounted handles
- 650W x 650D x 950H mm, with 1 container
- 800W x 650D x 950H mm, with 2 containers
- 1300W x 650D x 950H mm, with 3 containers




Waste disposal unit with hinged doors

- opening angle >180°
- worktop with integral hinged lid
- mobile waste disposal container
- 2 point locking
- 800W x 650D x 950H mm



Tool cabinets with drawers

- client specific drawer configuration
- 200kg load capacity
- handles with optional label insert
- central locking with drawer blocking mechanism
- 650/800/1300W x 650D x 950H mm
- mobile version with 2 fixed and 2 swivel & brake castors, complete with top tray and anti-slip mat
- 650/800/1050W x 650D x 880H mm

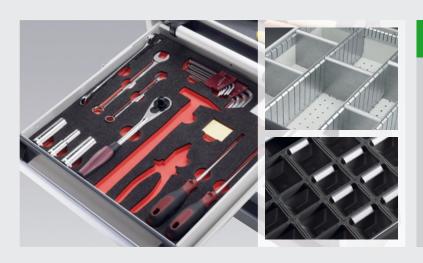

Drawer organisation

- partitions and cross dividers
- small parts storage boxes
- trough blocks
- anti-slip mats
- small part holders
- client specific custom foam inserts
- labelling system for drawers, dividers and small parts storage boxes



Worktops

- resistant against common workshop substances such as petrol, oil, battery acid etc.
- made from high quality plastics or stainless steel
- all surfaces/edges finished to a very high level
- material thickness = 12mm
- alternative worktop types can be selected from the bott cubio catalogue (maximum thickness must not exceed 30mm)



Rear panels and supporting framework for high level cabinets


- perforated rear panel to accept bott tool hooks and holders
- lower section can be configured as a service panel
- secured at the rear to the free-standing carrier framework





High level cabinet

- top hinged door with an opening angle > 90°
- adjustable shelves with a load capacity of 25kg
- handles with optional label insert
- optional integral disposable seat-cover or paper towel dispenser
- secured at the rear to the free-standing carrier framework
- 650/800/1300W x 325D x 600H mm

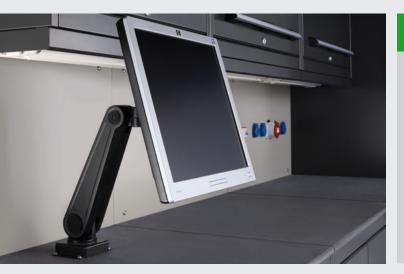

Service panel and lighting

- worktop lighting with canopy
- client specific power outlets and circuit configuration
- for 800/1300W mm



Shelf trolley


- convenient storage for component parts when performing vehicle maintenance tasks
- 50kg load capacity per shelf
- mutli-functional shelves provide a flat storage surface on one side or if reversed, a lipped shelf for use with Euro boxes
- 2 fixed and 2 swivel & brake castors
- 1150W x 600D x 1260H mm

Standard modules



Cabinet plinth

- plinth height = 50 mm
- with height adjustable feet (+ 40 mm)
- powder coated steel front panel
- floor seal, resistant against oil and petrol



Colours

- dark grey (RAL 7021), rear panels in traffic white (RAL 9016)
- client specific RAL colours available to match individual CI



Service

- on-site planning service
- visualise workshop layouts with3-D planning software
- professional assembly and installation service

